

Water Savings & Financial Benefits of Single-Family Package Greywater Systems



Water Savings and Financial Benefits Associated with Single- Family Package Greywater Systems

March 2017

Canadian Units Version



33 N LaSalle Street, Suite 2275
Chicago, Illinois 60602
(p) 773-360-5100 | (f) 773-345-3636
www.allianceforwaterefficiency.org

Author

Bill Gauley, P.Eng., Principal, Gauley Associates Ltd.

Funding

This project was funded by the [East Bay Municipal Utility District](#) and the [Portland Water Bureau](#), and with additional funding support provided by the [California Department of Water Resources](#).

Thank You

The author and the Alliance for Water Efficiency (AWE) would like to thank the Project Advisory Committee members:

- [Richard Harris](#), Manager of Water Conservation, East Bay Municipal Utility District
- [Judi Ranton](#), Water Efficiency Program Manager, Portland Water Bureau
- [Dave Bracciano](#), Demand Management Coordinator, Tampa Bay Water
- [Chelsea Hawkins](#), Program Planner, Alliance for Water Efficiency

The Alliance for Water Efficiency would also like to thank its intern [Farah Fidai](#) who conducted research related to this project.

Contents

Executive Summary.....	ES-1
<i>Shower-to-Toilet Greywater Systems</i>	ES-2
<i>Landscape Irrigation Greywater Systems</i>	ES-2
<i>Greywater Financial Benefits to the Utility</i>	ES-4
<i>Conclusion</i>	ES-4
1.0 Introduction	1
1.1 <i>Types of Greywater Systems</i>	1
1.2 <i>Calculating Water Savings</i>	2
1.3 <i>Use of Volumetric Rates when Calculating Financial Benefit</i>	2
2.0 Shower-to-Toilet Greywater Systems.....	3
2.1 <i>Theoretical Annual Household Water Savings</i>	3
2.2 <i>Estimated Gross Annual Cost Savings to Customer</i>	4
2.3 <i>Net Annual Cost Savings to Homeowner</i>	5
2.4 <i>Estimated Simple Cost Payback to Homeowner</i>	6
3.0 Landscape Irrigation Greywater Systems	8
3.1 <i>Potential Potable Water Savings</i>	8
3.2 <i>Gross Cost Savings to Homeowner</i>	10
3.3 <i>Net Cost Savings to Homeowner</i>	11
3.4 <i>Estimated Simple Cost Payback to Homeowner</i>	13
4.0 Financial Benefit to the Utility	17
5.0 Conclusion.....	18

Executive Summary

Potable water is typically used by homeowners to meet all indoor and outdoor water demands; however, some demands do not require potable water quality, e.g., toilet flushing and landscape irrigation. Greywater systems use non-potable water generated from showering and clothes washing as an alternative water supply to meet demands that do not require potable water.¹ This report provides some general water savings and cost information for use by water utilities and their customers when considering the merits associated with residential greywater systems. Although financial and water savings benefits may not be the only reasons for installing a greywater system, this report attempts to highlight key life-cycle cost considerations associated with owning and operating a greywater system.

While there is no cost associated with greywater generation in the home, the costs associated with buying, installing, and maintaining systems that reuse greywater must be considered when completing a benefit/cost analysis.

There are two main types of single-family package greywater systems:²

1. Greywater used for toilet flushing
2. Greywater used for landscape irrigation

There are three main types of landscape-based greywater systems:

1. Laundry to Landscape - Water from clothes washers is discharged directly to landscape.
2. Branched Drain - Showers and/or lavatory sinks drain via gravity directly to landscape.
3. Pumped Systems - Water from showers and/or clothes washer and/or lavatory sinks is directly pumped or temporarily stored in a holding tank before being pumped to the landscape.³

Note: The volume of water savings achieved via the use of a greywater system is not equal to the volume of greywater generated or collected. It is equal to the volume of potable water savings (offset) achieved by the user.

The water demands associated with showering and toilet flushing tend to be relatively consistent on a daily basis; therefore, the potential water savings associated with single-family shower-to-toilet greywater systems can be estimated with some accuracy. However, because there are significant variables and uncertainties associated with landscape irrigation demands, it is much more difficult to estimate the potential for water savings associated with landscape-based greywater systems.⁴

¹ Water from kitchen faucets and dishwashers is generally not considered as a source of greywater because it may contain food particles or grease. The volume of greywater provided by lavatory faucets is minimal and is not considered in the savings estimates included in this report.

² A package system is an “off the shelf” system vs. a system that is designed and engineered for a specific site.

³ Note that regulations and code requirements regarding the design, installation, and use of greywater storage tanks may vary from province to province.

⁴ Landscape-based greywater systems can also provide homeowners with a source of water during times of watering restrictions.

Greywater financial benefits are derived from reducing potable water demands. These systems provide a financial benefit to the homeowner if the total life-cycle value of the potable water savings is greater than the total life-cycle cost of the system.⁵

Shower-to-Toilet Greywater Systems

The *Residential End Uses of Water, Version 2* (REUS 2016) determined an average home produces almost twice as much shower-based greywater than would be required for toilet flushing (assuming the use of WaterSense®-labeled toilets). As such, the potential for potable water savings is related to the volume of water used for toilet flushing and not to the volume of greywater generated by showering.

The REUS 2016 also verified that, on average, each person flushes a toilet in the home about five times per day. Therefore, theoretical potable water savings associated with shower-to-toilet greywater systems is equal to about 8,760 litres per capita per year.⁶

The annual net cost savings of a greywater system equals the annual volume of potable water savings multiplied by the marginal volumetric rate for water (or water & wastewater) minus any operations and maintenance (O&M) costs for chemicals, electricity, replacement parts, etc.

The simple payback period of a greywater system equals the total installed cost of the system divided by the average annual net cost savings. If the payback period exceeds the expected life span of the greywater system, the system will have a net cost to the customer.

A water/cost savings analysis was completed using demand values from the REUS 2016. This analysis indicates that shower-to-toilet greywater systems may not be cost-effective to the homeowner unless household occupancy is very high, and/or water rates are very high, and/or system costs are relatively low.

Landscape Irrigation Greywater Systems

The REUS 2016 determined an average home with an occupancy rate 2.64 persons produces about 106 litres of greywater per day from showers and 87 litres from clothes washers, equating to about 40 litres per capita per day (Lcd) from showers and 33 Lcd from the clothes washer. While a total greywater production of 73 Lcd equates to about 26,645 litres per person per year there are three variables making it extremely unlikely 100 percent of the greywater produced would offset potable water demand:

1. Climate: Savings will be lower in areas where the irrigation season or plant water use requirements occur less than 12 months per year.
2. Weather: Even during the irrigation season there are likely to be days when precipitation provides all or part of required irrigation.

⁵ Formulas used to calculate the water and cost savings associated with the different types of greywater systems are provided in the main body of the report.

⁶ 4.8 litres/flush x 5 flushes/person/day x 365 days/year = 8,760 litres/year/person.

3. Accuracy/Timing Limitations: It is unlikely a homeowner would accurately calculate and balance irrigation demands and greywater availability on a daily basis.

Naturally, the potential for potable water savings for irrigation-based greywater systems is greater if they are installed in climates with longer irrigation seasons. While the impact of weather and accuracy/timing has not been verified by known independent third-party studies, this report assumes potable water irrigation savings equivalent to 75% of the average volume of greywater produced on a daily basis. The theoretical annual household potable water savings are therefore:

- laundry-to-landscape systems =
 $33 \text{ Lcd} \times 75\% \times \text{number of persons/household (pph)} \times \text{irrigation season (days/year)}$
- branched drain systems =
 $40 \text{ Lcd} \times 75\% \times \text{pph} \times \text{irrigation season (days/year)}$
- pumped systems =
 $73 \text{ Lcd} \times 75\% \times \text{pph} \times \text{irrigation season (days/year)}$

The annual net cost savings of a greywater system equals the annual volume of potable water savings multiplied by the marginal volumetric rate for water (or water & wastewater) minus any O&M costs for chemicals, electricity, replacement parts, etc.⁷

The simple payback period of a greywater system equals the total installed cost of the system divided by the annual net cost savings. Installed costs are estimated to range from as little as a couple hundred dollars for a do-it-yourself laundry-to-landscape system to more than \$5,000 for a professionally installed pumped system. If the payback period exceeds the expected life span of the greywater system, the system will have a net cost to the customer.

Landscape-based greywater systems are more likely to be cost-effective to the homeowner if:

- Home has a high marginal volumetric water (or water/sewer) rate
- Home has a high occupancy rate
- Home is located in area with long irrigation season (e.g. >7 months for landscape-based greywater systems)
- A low cost greywater system is installed
- The greywater system has low operations and maintenance costs
- A Do-It-Yourself greywater system is installed during home construction vs. retrofit

Greywater Financial Benefits to the Utility

Reducing customer water demands can financially benefit a water utility, especially if the utility is operating at or near its system's peak production rate or if it is faced with a shortage of water supply.⁸

⁷ O&M costs associated with laundry-to-landscape and branched drain systems are minimal.

Utilities can compare their unit cost (e.g., \$ per L/day) of achieving water savings through a greywater reuse program (demand-side management) to the unit cost of expanding the system's water supply. If the unit cost of the demand-side option is lower, the program is cost-effective and provides a financial benefit to the utility.

Conclusion

Due to their cost and, often, complexity, greywater reuse programs are better suited as long-term, ongoing programs rather than as short-term solutions to drought. The water savings achieved by a greywater system is equal to the **long-term reduction in potable water demands** achieved by the homeowner. While financial benefits may not be the only reason for a homeowner to install a greywater system, if the total life-cycle costs of the system exceed the total life-cycle savings from reduced potable water purchases, the system will have a net cost to the homeowner.

Water utilities are strongly encouraged to use their own values, e.g., volumetric water rates, persons per household, length of irrigation season, greywater system cost, unit cost of adding additional water supply, etc., to assess the cost-effectiveness associated with implementing a single-family greywater reuse program in their own community. As data from more independent third-party field studies becomes available (especially regarding landscape-based greywater systems) it is hoped that the values identified in this report can be further refined.

⁸ Lower water demands can also reduce a utility's variable costs (e.g., energy and chemical costs).

1.0 Introduction

The Alliance for Water Efficiency (AWE) website describes greywater as, “untreated wastewater resulting from lavatory wash basins, laundry and bathing.” Greywater does not include wastewater from toilets, urinals, or any industrial process. Wastewater from kitchen sinks and dishwashers is also typically excluded due to the potential presence of food particles and/or grease.

Greywater systems provide users with non-potable water generated onsite as an alternative water supply to meet demands that do not require potable water, e.g., toilet flushing and landscape irrigation. While greywater is produced onsite and available to the user at no cost, there are costs associated with buying, installing, and maintaining residential greywater systems and these costs must be considered when evaluating the financial benefits associated with the use of these systems.

Water utilities often come under well-intended pressure from the public, decision makers, non-government organizations (NGOs), and other stakeholders to promote and incentivize water demand management measures, especially during times of drought and water scarcity. It is difficult, however, for water providers to make informed water conservation and efficiency planning decisions in cases where there is insufficient or conflicting information regarding expected water savings and/or program cost-effectiveness. The AWE Water Efficiency Research Committee identified a need to develop this reference document to outline the range of expected costs and savings associated with installing and operating single-family package greywater systems.

Note: While individual homes may save more or less potable water/money than the values presented herein, it is the intent of this document to present realistic system savings and costs values. The information presented herein is also intended to assist water utilities considering the merits of a greywater conservation incentive program.

1.1 Types of Greywater Systems

There are two main types of single-family packaged greywater systems:

1. Greywater used for toilet flushing
2. Greywater used for landscape irrigation

There are three main types of landscape-based greywater systems:

1. Laundry to Landscape - Water from clothes washers is discharged directly to landscape.
2. Branched Drain - Showers and/or lavatory sinks drain via gravity directly to landscape.
3. Pumped Systems - Water from showers and/or clothes washer and/or lavatory sinks is pumped or temporarily stored in a holding tank before being pumped to the landscape.⁹

⁹ Note that regulations and code requirements regarding the design, installation, and use of greywater storage tanks may vary from province to province.

1.2 *Calculating Water Savings*

It is important to note that the volume of water savings achieved via the use of a greywater system is not equal to the volume of greywater generated or collected but rather to the resulting volume of potable water savings achieved by the user.

The volume of water savings is not equal to the volume of greywater collected.

The volume of water savings is equal to the reduction in potable water demands.

Because the volume of water generated from showering and the volume of water used for toilet flushing in single-family homes tend to be fairly consistent on a daily basis, the potential water savings associated with single-family shower-to-toilet greywater systems can be estimated with some accuracy.

There are significant variables and uncertainties associated with determining the potential potable water savings derived from landscape-based greywater systems. Irrigation demands are weather-dependent, meaning that they can vary from day to day, season to season, and from geographic location to geographic location. Irrigation demands can also vary significantly from homeowner to homeowner depending on landscape properties and customer behavior. Unfortunately, there are very few independent third-party field studies that accurately identify potable water saving values, and none which have separately measured indoor and outdoor water usage changes. As such, while verified and referenced values have been used in this report where possible, values have been assumed when necessary.

1.3 *Use of Volumetric Rates when Calculating Financial Benefit*

The financial benefit to a customer using a greywater system is equal to the volume of potable water savings multiplied by the marginal volumetric water rate (or combined water and sewer rate), minus any operations and maintenance (O&M) costs. Note that there will be no reduction in homeowner wastewater (sewer) service charges for landscape-based greywater systems in areas where these charges are billed on a flat rate basis or where these charges are based on non-seasonal (winter) water demands. It is also important that fixed fees on the water bill, e.g., meter charges or debt reduction charges, etc., are not included when calculating the marginal volumetric rate.

When calculating financial savings associated with greywater systems, use only the volumetric cost of water and/or sewer.


2.0 Shower-to-Toilet Greywater Systems

2.1 Theoretical Annual Household Water Savings

The *Residential End Uses of Water, Version 2* (REUS 2016) identifies an average occupancy rate of 2.64 persons per household (pph) with an average per capita toilet flushing rate of 5.0 times per day.¹⁰ These values are used in many of the calculations provided in this report to estimate theoretical savings.

The REUS 2016 also found that an average home produces about 40 litres of shower-based greywater per person per day.¹¹ Since a home fitted with WaterSense®-labeled toilets using 4.8 litres per flush would only require about 24 litres per person day for toilet flushing,¹² the volume of shower-based greywater produced each day is much greater than the volume required for toilet flushing. The potential for potable water savings, therefore, is related to the volume of water used for toilet flushing and not to the volume of greywater generated by showering.

Figure 1. Shower to Toilet Greywater System Schematics



In most cases, the volume of greywater derived from showers far exceeds the volume of potable water used for toilet flushing. This is a useful example for explaining that the potential for water savings relates to the volume of potable water saved, not the amount of greywater produced.

The theoretical water savings for a shower-to-toilet greywater system in a home with 2.64 persons (as per REUS 2016) would be 23,126 litres per year,¹³ or somewhat higher than the 16,000¹⁴ and 10,650¹⁵ litres per year observed in two field studies.

¹⁰ Water Research Foundation, *Residential End Uses of Water, Version 2*, (2016)

¹¹ REUS 2016, 106 litres per home per day ÷ 2.64 persons per home = 40 litres per capita per day

¹² 4.8 litres/flush x 5.0 flushes/capita/day

¹³ 2.64 persons x 24 litres/capita/day x 365 days/year

¹⁴ City of Guelph Residential Greywater Field Test, 2012, homes fitted with efficient toilet fixtures, prorated to 2.64 persons per home.

¹⁵ Craig, Madeline J., *Developing a Standard Methodology for Testing Field Performance of Residential Greywater Reuse Systems*, 2015, Section 5.1.6, prorated to 2.64 persons per home.

Water utilities can estimate theoretical household potable water savings associated with shower-to-toilet greywater systems by using Equation 1 or the values provided in Table 1. Note that actual savings may be somewhat less than theoretical values.

Equation 1: Shower-to-Toilet Greywater System Theoretical Annual Household Water Savings

$$4.8 \text{ litres/flush} \times 5.0 \text{ flushes/capita/day} \times \text{pph} \times 365 \text{ days/year}$$

Table 1. Shower-to-Toilet Greywater System Theoretical Annual Household Water Savings

<i>Persons per Household (pph)</i>	<i>Annual Water Saving (litres)</i>	<i>Annual Water Saving¹⁶ (m³)</i>
1	8,760	9
2	17,520	18
3	26,280	26
4	35,040	35
5	43,800	44
6	52,560	53

Example Calculation: 3 pph x 4.8 L/flush x 5 flushes/person/day x 365 days/year = 26,280 L/yr = 26 m³/yr

2.2 Estimated Gross Annual Cost Savings to Customer

The gross annual cost savings for a homeowner is calculated as the annual volume of potable water savings multiplied by the marginal volumetric rate for water (or water & wastewater) – see Equation 2.

Equation 2: Shower-to-Toilet Greywater System Gross Annual Cost Savings

$$\text{Annual Household Savings} \times \text{Marginal Cost of Water}$$

Table 2 illustrates gross annual cost savings for different persons per household (pph) values based on a range of volumetric water/wastewater rates.¹⁷ Fixed fees on the water bill, e.g., meter charges or debt reduction charges, etc., should not be included when calculating the volumetric rate.

¹⁶ Savings rounded to the nearest m³.

¹⁷ Both water and wastewater rates must be considered when evaluating the savings related to shower-to-toilet greywater systems.

Table 2. Shower-to-Toilet Greywater System Gross Annual Household Cost Savings

Persons per household	Annual Water Savings (m ³)	Total Volumetric Rate per m ³						
		\$1	\$2	\$3	\$4	\$5	\$6	\$7
1	9	\$9	\$18	\$27	\$36	\$45	\$54	\$63
2	18	\$18	\$36	\$54	\$72	\$90	\$108	\$126
3	26	\$26	\$52	\$78	\$104	\$130	\$156	\$182
4	35	\$35	\$70	\$105	\$140	\$175	\$210	\$245
5	44	\$44	\$88	\$132	\$176	\$220	\$264	\$308
6	53	\$53	\$106	\$159	\$212	\$265	\$318	\$371

Example Calculation: 3 pph, 26 m³ per year savings, volumetric water rate of \$5 per m³ (e.g., 2 per m³ water plus \$3 per m³ wastewater).

$$26 \text{ m}^3 \text{ per year} \times \$5 \text{ per m}^3 = \$130 \text{ per year savings}$$

2.3 Net Annual Cost Savings to Homeowner

The net annual cost savings to single-family homeowners equals the gross annual cost savings minus any operations and maintenance (O&M) costs, such as the cost of electricity, filters, chemicals, or replacement of parts – see Equation 3.

Equation 3: Shower-to-Toilet Greywater System Net Annual Cost Savings

$$\text{Gross Annual Cost Savings} - \text{Annual O\&M Costs}$$

The National Academy of Sciences report, *Using Greywater and Stormwater to Enhance Local Water Supplies: An Assessment of Risks, Costs, and Benefits* (Table 7.1) estimates operational costs (i.e., chemical and energy costs) for residential greywater systems as approximately \$1 USD per thousand U.S. gallons or about \$0.35 CAD¹⁸ per m³.

Some jurisdictions require backflow prevention devices to be installed on greywater systems if they are connected to a potable water system. In such cases it is not uncommon for the jurisdiction to require the homeowner to pay the purchase and installation costs of the backflow device as well as the annual or periodic testing or inspection of these devices to ensure they continue to function properly to avoid potential contamination of the potable water supply. Some jurisdictions may also require the homeowner to purchase a permit before installing a greywater system. Where these requirements exist, any associated costs must be included as an operational cost to the homeowner.

Maintenance costs are expected to be minimal for the first few years when the greywater system is relatively new; however, many system parts – and ultimately the entire system – will eventually need replacing. Each greywater system design will have its own maintenance requirements and costs for

¹⁸ Based on current (March 2017) exchange rate of \$1.00 USD = \$1.33 CAD.

cleaning or replacing filters, for adding chemicals, for cleaning storage tanks, etc. While the average annual cost of maintenance will vary depending on system design, in lieu of system-specific maintenance costs identified through the implementation of independent third-party field studies, a minimum average cost of \$50 CAD per year has been assumed for calculations included in this report.¹⁹ Actual average annual maintenance costs should be used by water utilities in calculations where possible.

In Table 3, the estimated annual O&M costs (i.e., operations costs of \$0.35 per m³ and an average annual maintenance costs of \$50 for replacement parts) are deducted from the annual gross cost savings values identified in Table 2. Table 3 identifies the annual net cost savings associated with shower-to-toilet greywater systems for various household occupancy rates and volumetric water/wastewater rates. The negative annual net savings values in Table 3 illustrate examples where the costs associated with using a greywater system may exceed the annual savings from reduced water purchases.

Table 3. Shower to Toilet System Annual Net Cost Savings

Persons per household	Annual Water Savings (m ³)	Volumetric Rate per m ³						
		\$1	\$2	\$3	\$4	\$5	\$6	\$7
1	9	-\$44	-\$35	-\$26	-\$17	-\$8	\$1	\$10
2	18	-\$38	-\$20	-\$2	\$16	\$34	\$52	\$70
3	26	-\$33	-\$7	\$19	\$45	\$71	\$97	\$123
4	35	-\$27	\$8	\$43	\$78	\$113	\$148	\$183
5	44	-\$21	\$23	\$67	\$111	\$155	\$199	\$243
6	53	-\$16	\$37	\$90	\$143	\$196	\$249	\$302

Example Calculation: 3 pph, 26 m³/year savings, volumetric water/wastewater rate of \$5 per m³, \$0.35 per m³ operational costs (energy and chemicals), \$50/year average maintenance cost

$$26 \text{ m}^3 \times \$5 \text{ per m}^3 - (26 \times \$0.35/\text{m}^3 \text{ operational cost}) - (\$50 \text{ maintenance cost}) = \$71 / \text{year}$$

2.4 Estimated Simple Cost Payback to Homeowner

The simple payback for installing a greywater system is calculated as the total installed cost of the system divided by the average annual net cost savings – see Equation 4. If the payback period exceeds the expected life span of the greywater system, the system will have a net cost to the homeowner. For example, a \$4,000 greywater system²⁰ with a 15-year life-cycle²¹ would need to achieve an annual net

¹⁹ A 2014 article by Donna Ferguson posted on www.theguardian.com (*Greywater Systems: Can They Really Reduce Your Bills?*) estimates maintenance costs of \$50 CAD per year (converted from £30 per year). Several reports identify higher costs, e.g., *Economic Assessment Tool for Greywater Recycling Systems* estimates costs of about \$100 CAD per year (converted from £60 per year for inspection and maintenance), F.A. Memon, PhD, et al.

²⁰ *A Guide to Greywater Systems*, <https://www.choice.com.au/home-improvement/water/saving-water/articles/guide-to-greywater-systems>, identifies a system cost of \$4,000 Australian which is equivalent to about \$4,000 CAD.

²¹ *Cost-Benefit Analysis of Onsite Residential Greywater Recycling – A Case Study: the City of Los Angeles*, Zita L.T.Yu, et al., estimates an average service lifetime of 15 years.

savings of at least \$267 per year to be cost-effective, i.e., to have a payback period less than the system’s expected life span.²²

Equation 4: Shower-to-Toilet Greywater System Payback Period (years)

$$\text{Total Installed Cost} \div \text{Net Annual Cost Savings}$$

As an example, Table 4 illustrates payback periods in years for a \$4,000 shower-to-toilet greywater system using different household occupancy rates and volumetric water/wastewater rates. Shaded cells indicate conditions where the anticipated payback period would be less than 15 years, i.e., where installing a \$4,000 system with a 15-year life span would be cost-effective to the homeowner. Cells containing no values indicate conditions where annual costs exceed annual savings and, therefore, the system will never pay for itself.

Table 4. Shower-to-Toilet System Payback Period for a \$4,000 Greywater System (Years)

Persons per household	Annual Water Savings (m ³)	Volumetric Rate per m ³						
		\$1	\$2	\$3	\$4	\$5	\$6	\$7
1	9	-	-	-	-	-	4706	406
2	18	-	-	-	255	119	77	57
3	26	-	-	212	89	56	41	33
4	35	-	516	94	51	35	27	22
5	44	-	177	60	36	26	20	16
6	53	-	107	44	28	20	16	13

Example Calculation: 3 pph, save 26 m³ per year, volumetric water/wastewater rate of \$5 per m³, net annual savings of \$71 (Table 3), total installed greywater system cost of \$4,000

$$\$4,000 \text{ installed cost} \div \$71 \text{ net annual cost savings} = 56 \text{ years}$$

As illustrated in Table 4, shower-to-toilet greywater systems are unlikely to be cost-effective to homeowners except in cases where household occupancy is very high, and/or water rates are very high, and/or system costs are much lower than the \$4,000 cost assumed in Table 4.

²² \$4000 ÷ 15 years = \$267 per year


3.0 Landscape Irrigation Greywater Systems

3.1 Potential Potable Water Savings

While the volume of greywater production in a single-family home is equal to the total volume of water used for showering and clothes washing (the volume of water contributed by lavatory sinks is minimal), the financial benefit associated with the use of greywater systems is directly related to the volume of potable water saved by the homeowner. Because of the large number of variables associated with landscape irrigation (e.g., climate, weather, system efficiency, etc.) it is difficult to accurately estimate the potential for potable water savings.

The REUS 2016 (Figure 6.12) determined an average home with an occupancy rate 2.64 persons produces about 193 litres of greywater per day split between 106 litres from showers and 87 litres from clothes washers. These demands equate to about 40 litres per capita per day (Lcd) from showers and 33 Lcd from the clothes washer, for a total greywater production of 73 Lcd.

Figure 2. Landscape Irrigation Greywater System Schematics

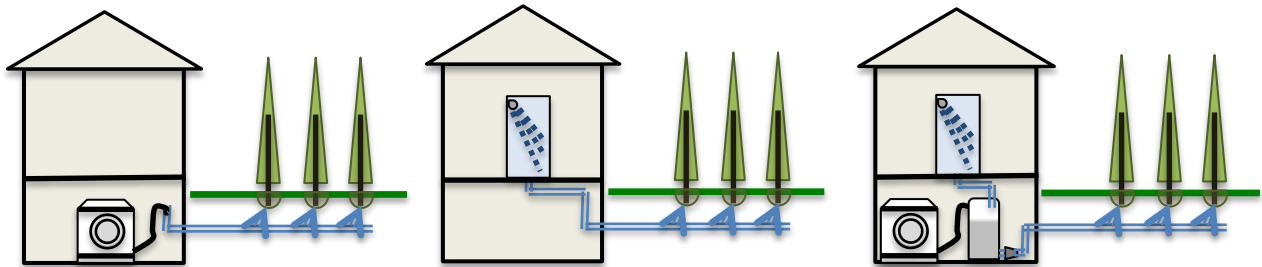

Greywater irrigation systems can be configured in a few ways. Combining greywater from showers and clothes washers is estimated to yield 193 litres of greywater per day for an average household. Though significant, it's unlikely that there would be a complete offset of potable water demand for irrigation purposes.

While 73 Lcd equates to about 26,645 litres of greywater production per person per year, there are three variables that make it extremely unlikely that 100 percent of the greywater produced would offset potable water demand:

1. **Climate:** Savings will be lower if a landscape-based greywater system is installed in a location where irrigation is required for fewer than 12 months per year.
2. **Weather:** Even during the irrigation season there are likely to be days when precipitation provides all or part of required irrigation.
3. **Accuracy and Timing Limitations:** It is unlikely a homeowner would accurately calculate and balance irrigation demands and greywater availability on a daily basis.²³

²³ Many homeowners significantly over-water or under-water their landscapes, further complicating savings estimates.

As stated earlier, there are very few independent third-party field studies that accurately quantify the potable water saving values associated with use of landscape-based greywater systems. The National Academy of Sciences report *Using Greywater and Stormwater to Enhance Local Water Supplies: An Assessment of Risks, Costs, and Benefits* (page 57) states “the maximum possible potential for demand reduction that can be achieved through greywater reuse...does not reflect what can be realistically achieved in the near future” and the conclusion of the report (page 87) states “water savings associated with greywater irrigation at the household scale have not been demonstrated with confidence.”

While it appears likely that less than one litre of potable water will be offset for each litre of greywater produced in a home, there are currently no known studies that accurately identify the relationship between greywater production and potable water savings. As such, Equations 5a, 5b, and 5c assume the combined impact of weather plus accuracy and timing limitations (weather/accuracy) will conservatively reduce potable water savings to 75% of the theoretical value, thus reducing the potential savings from laundry-to-landscape systems to 25 Lcd (75% x 33 Lcd), the potential savings from shower-based (branched drain) systems to 30 Lcd (75% x 40 Lcd), and the potential savings from pumped systems to 55 Lcd (75% x 73 Lcd).²⁵

The study, *Residential Greywater Systems in California*,²² analyzed water demand data for 37 homes with irrigation-based greywater systems. The study found a large range in water savings with an average of 42 litres (11 gallons) per person per day in homes that installed greywater systems but no other water savings measures. The study also found that many homeowners implemented other water efficiency measures in addition to installing a greywater system, resulting in an average overall program water savings of 64 litres (17 gallons) per person per day. Some homes added new plant beds after installing their greywater system and experienced slight increases in demand.

As stated earlier, the potential for potable water savings is greater for irrigation-based greywater systems installed in climates with longer irrigation seasons. Water utilities should use the length of their own irrigation season when using Equations 5a through 5c. For illustration purposes, Table 5 provides examples of annual household savings values for the three types of systems using Equations 5a, 5b, and 5c and assuming an irrigation season of 274 days (9 months).

Equation 5a: Laundry-to-Landscape System Annual Household Savings, litres

$$25 \text{ Lcd} \times \text{pph} \times \text{irrigation season (days/year)}$$

Equation 5b: Branched Drain System Annual Household Savings, litres

$$30 \text{ Lcd} \times \text{pph} \times \text{irrigation season (days/year)}$$

Equation 5c: Pumped System Annual Household Savings, litres

$$55 \text{ Lcd} \times \text{pph} \times \text{irrigation season (days/year)}$$

²⁴ The complete study *Residential Greywater Irrigation Systems in California: An Evaluation of Soil and Water Quality, User Satisfaction, and Installation Costs*, Laura Allen, et al., is available at <https://greywateraction.org/residential-greywater-system-study/>.

²⁵ An actual-to-theoretical savings factor has been assumed until sufficient independent third-party field study data becomes available to more accurately quantify the combined impact of weather and precision limitations.

Table 5. Landscape-Based Greywater Systems, Annual Water Savings for 274-day Irrigation Season

Persons per Household	Laundry-to Landscape, m³/year (25 Lcd x 274 days/yr)	Branched Drain, m³/year (30 Lcd x 274 days/yr)	Pumped, m³/year (55 Lcd x 274 days/yr)
1	7	8	15
2	14	16	30
3	20	25	45
4	27	33	60
5	34	41	75
6	41	49	90

3.2 Gross Cost Savings to Homeowner

The gross annual cost savings to a homeowner installing a greywater system is calculated as the annual volume of potable water savings multiplied by the marginal volumetric rate for water (or water & wastewater) – see Equations 6a, 6b, and 6c.

Equation 6a: Laundry-to-Landscape System Gross Annual Cost Savings

$$25 \text{ Lcd} \times \text{pph} \times \text{irrigation season (days/year)} \times \text{Volumetric Cost of Water}$$

Equation 6b: Branched Drain Systems Gross Annual Cost Savings

$$30 \text{ Lcd} \times \text{pph} \times \text{irrigation season (days/year)} \times \text{Volumetric Cost of Water}$$

Equation 6c: Pumped Systems Gross Annual Cost Savings

$$55 \text{ Lcd} \times \text{pph} \times \text{irrigation season (days/year)} \times \text{Volumetric Cost of Water}$$

Tables 6a, 6b, and 6c provide examples of gross annual cost savings values for different persons per household values and different volumetric water/wastewater rates assuming a 274-day (9-month) irrigation season. Water utilities with shorter or longer irrigation seasons should expect to achieve different annual savings values than those illustrated in Tables 6a, 6b, and 6c.

Table 6a. Laundry-to-Landscape Greywater System Gross Annual Household Cost Savings

Persons per Household	Annual Water Savings (m³)	Volumetric Rate per m³						
		\$1	\$2	\$3	\$4	\$5	\$6	\$7
1	7	\$7	\$14	\$21	\$28	\$35	\$42	\$49
2	14	\$14	\$28	\$42	\$56	\$70	\$84	\$98
3	20	\$20	\$40	\$60	\$80	\$100	\$120	\$140
4	27	\$27	\$54	\$81	\$108	\$135	\$162	\$189
5	34	\$34	\$68	\$102	\$136	\$170	\$204	\$238
6	41	\$41	\$82	\$123	\$164	\$205	\$246	\$287

Example Calculation: 3 pph, 274-day irrigation season, volumetric rate of \$5 per m³.

$$20 \text{ m}^3 \text{ per year} \times \$5 \text{ per m}^3 = \$100 \text{ per year gross savings}$$

Table 6b. Branched Drain Greywater System Gross Annual Household Cost Savings

Persons per Household	Annual Water Savings (m ³)	Volumetric Rate per m ³						
		\$1	\$2	\$3	\$4	\$5	\$6	\$7
1	8	\$8	\$16	\$24	\$32	\$40	\$48	\$56
2	16	\$16	\$32	\$48	\$64	\$80	\$96	\$112
3	25	\$25	\$50	\$75	\$100	\$125	\$150	\$175
4	33	\$33	\$66	\$99	\$132	\$165	\$198	\$231
5	41	\$41	\$82	\$123	\$164	\$205	\$246	\$287
6	49	\$49	\$98	\$147	\$196	\$245	\$294	\$343

Example Calculation: 3 pph, 274-day irrigation season, volumetric rate of \$5 per m³.

$$25 \text{ m}^3 \text{ per year} \times \$5 \text{ per m}^3 = \$125 \text{ per year gross savings}$$

Table 6c. Pumped Greywater System Gross Annual Household Cost Savings

Persons per Household	Annual Water Savings (m ³)	Volumetric Rate per m ³						
		\$1	\$2	\$3	\$4	\$5	\$6	\$7
1	15	\$15	\$30	\$45	\$60	\$75	\$90	\$105
2	30	\$30	\$60	\$90	\$120	\$150	\$180	\$210
3	45	\$45	\$90	\$135	\$180	\$225	\$270	\$315
4	60	\$60	\$120	\$180	\$240	\$300	\$360	\$420
5	75	\$75	\$150	\$225	\$300	\$375	\$450	\$525
6	90	\$90	\$180	\$270	\$360	\$450	\$540	\$630

Example Calculation: 3 pph, 274-day irrigation season, volumetric rate of \$5 per m³.

$$45 \text{ m}^3 \text{ per year} \times \$5 \text{ per m}^3 = \$225 \text{ per year gross savings}$$

3.3 Net Cost Savings to Homeowner

The annual net cost savings to a homeowner is calculated as the gross annual cost savings minus any operations and maintenance (O&M) costs, such as the cost of electricity, filters, chemicals, or replacement of parts – see Equation 7.

Equation 7: Landscape Irrigation Greywater Systems Net Annual Cost Savings

$$\text{Gross Annual Cost Savings} - \text{Annual O\&M Costs}$$

There are few O&M costs associated with laundry-to-landscape and branched drain systems. In laundry to landscape systems the clothes washer pumps greywater directly to the landscape²⁶ and in branched drain systems the greywater flows directly to the landscape by gravity. As such, the net annual cost savings to customers for these two types of systems is essentially equal to the gross annual cost savings – see Table 7a and 7b.

Table 7a. Laundry-to-Landscape Greywater System Net Annual Household Cost Savings

²⁶ The clothes washer will either pump greywater to the sewer or to the landscape. There are no 'additional' energy costs associated with pumping greywater to the landscape.

Persons per Household	Annual Water Savings (m ³)	Volumetric Rate per m ³						
		\$1	\$2	\$3	\$4	\$5	\$6	\$7
1	7	\$7	\$14	\$21	\$28	\$35	\$42	\$49
2	14	\$14	\$28	\$42	\$56	\$70	\$84	\$98
3	20	\$20	\$40	\$60	\$80	\$100	\$120	\$140
4	27	\$27	\$54	\$81	\$108	\$135	\$162	\$189
5	34	\$34	\$68	\$102	\$136	\$170	\$204	\$238
6	41	\$41	\$82	\$123	\$164	\$205	\$246	\$287

Example Calculation: 3 pph, 274-day irrigation season, volumetric rate of \$5 per m³.

$$20 \text{ m}^3 \text{ per year} \times \$5 \text{ per m}^3 = \$100 \text{ per year gross savings}$$

Table 7b. Branched Drain Greywater System Net Annual Household Cost Savings

Persons per Household	Annual Water Savings (m ³)	Volumetric Rate per m ³						
		\$1	\$2	\$3	\$4	\$5	\$6	\$7
1	8	\$8	\$16	\$24	\$32	\$40	\$48	\$56
2	16	\$16	\$32	\$48	\$64	\$80	\$96	\$112
3	25	\$25	\$50	\$75	\$100	\$125	\$150	\$175
4	33	\$33	\$66	\$99	\$132	\$165	\$198	\$231
5	41	\$41	\$82	\$123	\$164	\$205	\$246	\$287
6	49	\$49	\$98	\$147	\$196	\$245	\$294	\$343

Example Calculation: 3 pph, 274-day irrigation season, volumetric rate of \$5 per m³.

$$25 \text{ m}^3 \text{ per year} \times \$5 \text{ per m}^3 = \$125 \text{ per year gross savings}$$

For pumped systems, however, the National Academy of Sciences report *Using Greywater and Stormwater to Enhance Local Water Supplies: An Assessment of Risks, Costs, and Benefits* (Table 7.1) estimates operations costs (i.e., chemical and energy costs) to be about \$1 USD per thousand gallons or about \$0.35 CAD²⁷ per m³.

Maintenance costs associated with pumped systems are expected to be minimal for the first few years when the system is relatively new; however, many system parts – and ultimately the entire system – will eventually need replacing. Each pumped greywater system design will have its own maintenance requirements and costs for cleaning or replacing filters, for adding chemicals, for cleaning storage tanks, etc. While the average annual cost of maintenance will vary depending on system design, in lieu of system-specific maintenance cost field data, an average cost of \$50 per year has been assumed for calculations in this report.²⁸

²⁷ Based on current (March 2017) exchange rate of \$1.00 USD = \$1.33 CAD.

²⁸ A 2014 article by Donna Ferguson posted on www.theguardian.com (*Greywater Systems: Can They Really Reduce Your Bills?*) estimates maintenance costs of \$50 CAD per year (converted from £30 per year). Several reports identify higher costs, e.g., *Economic Assessment Tool for Greywater Recycling Systems* estimates costs of about \$100 CAD per year (converted from £60 per year for inspection and maintenance), F.A. Memon, PhD, et al.

Table 7c presents the annual net cost savings for pumped systems using an operational cost of \$0.35 per m³ and an average annual maintenance cost of \$50. The negative annual net savings values in Table 7c illustrate examples where the costs associated with using a greywater system may exceed the annual savings from reduced water purchases.

Table 7c. Pumped Greywater System Net Annual Household Cost Savings

Persons per Household	Annual Water Savings (m ³)	Volumetric Rate per m ³						
		\$1	\$2	\$3	\$4	\$5	\$6	\$7
1	15	-\$40	-\$25	-\$10	\$5	\$20	\$35	\$50
2	30	-\$31	-\$1	\$30	\$60	\$90	\$120	\$150
3	45	-\$21	\$24	\$69	\$114	\$159	\$204	\$249
4	60	-\$11	\$49	\$109	\$169	\$229	\$289	\$349
5	75	-\$1	\$74	\$149	\$224	\$299	\$374	\$449
6	90	\$9	\$99	\$189	\$279	\$369	\$459	\$549

Example Calculation: 3 pph, 274-day irrigation season, save 45 m³ per year, volumetric rate of \$5 per m³, \$16 per year operations costs (i.e., \$0.35 per m³ x 45 m³), \$50/year maintenance cost.

$$45 \text{ m}^3 \text{ per year} \times \$5 \text{ per m}^3 - \$16 / \text{year operations} - \$50 / \text{year maintenance} = \$159 / \text{year net savings}$$

3.4 Estimated Simple Cost Payback to Homeowner

The simple payback to a homeowner installing a greywater system is calculated as the total installed cost of the system divided by the annual net cost savings – see Equation 8.

Equation 8: Landscape Irrigation Greywater Systems Payback Period

$$\text{Total Installed Cost} \div \text{Net Annual Cost Savings}$$

Two reports – the National Academies of Sciences, *Using Greywater and Stormwater to Enhance Local Water Supplies: An Assessment of Risks, Costs, and Benefits* and the Greywater Action report *Residential Greywater Irrigation Systems in California: An Evaluation of Soil and Water Quality, User Satisfaction, and Installation Costs* estimate the costs for landscape-based greywater systems provided in Table 8.

Table 8. Purchase/Installation Cost of Landscape Irrigation Greywater Systems (converted from USD)

Reference	Laundry-to Landscape DIY	Laundry-to Landscape Professional Installation	Branched Drain DIY	Branched Drain Professional Installation	Pumped System DIY	Pumped System Professional Installation
National Academies of Sciences	\$160	\$1,670	NA	NA	\$3,070	\$13,300*

Greywater Action	\$330	\$1,000	\$930	\$2,330	\$2,400	\$5,070
Average	\$245	\$1,335	\$930	\$2,330	\$2,735	\$9,185

*Report identifies a range in costs from about \$6,670 to \$20,000 CAD. An average cost of \$13,300 CAD has been assumed.

In Tables 9 through 11 shading indicates conditions that result in a payback period of 15 years or less (values rounded to nearest year) based on the assumption that the average life span of a greywater system is about 15 years, i.e., shaded cells show conditions where the system should provide a net cost savings to the customer.²⁹

Table 9a. Do-it-Yourself Laundry-to-Landscape Payback Period in Years (@\$245)

Persons per Household	Annual Water Savings (m ³)	Volumetric Rate per m ³						
		\$1	\$2	\$3	\$4	\$5	\$6	\$7
1	7	35	18	12	9	7	6	5
2	14	18	9	6	4	4	3	3
3	20	12	6	4	3	2	2	2
4	27	9	5	3	2	2	2	1
5	34	7	4	2	2	1	1	1
6	41	6	3	2	1	1	1	1

Example Calculation: 3 pph, 274-day irrigation season, save 20 m³/year, volumetric rate of \$5 per m³

$$\$245 \text{ installed cost} \div \$100 \text{ /year net savings (Table 7a)} = 2 \text{ years}$$

Table 9b. Professional Installation Laundry to Landscape Payback Period in Years (@\$1,335)

Persons per Household	Annual Water Savings (m ³)	Volumetric Rate per m ³						
		\$1	\$2	\$3	\$4	\$5	\$6	\$7
1	7	191	95	64	48	38	32	27
2	14	95	48	32	24	19	16	14
3	20	67	33	22	17	13	11	10
4	27	49	25	16	12	10	8	7
5	34	39	20	13	10	8	7	6
6	41	33	16	11	8	7	5	5

Example Calculation: 3 pph, 274-day irrigation season, save 20 m³/year, volumetric rate of \$5 per m³

$$\$1,335 \text{ installed cost} \div \$100 \text{ /year net savings (Table 7a)} = 13 \text{ years}$$

²⁹ The report *Life Cycle Impact Assessment of Greywater Recycling Technology for New Developments*, F.A. Memon et al. (revised 2007) estimates an average design life of 15 years.

Table 10a. Do-it-Yourself Branched Drain Payback Period in Years (@\$930)

Persons per Household	Annual Water Savings (m ³)	Volumetric Rate per m ³						
		\$1	\$2	\$3	\$4	\$5	\$6	\$7
1	8	116	58	39	29	23	19	17
2	16	58	29	19	15	12	10	8
3	25	37	19	12	9	7	6	5
4	33	28	14	9	7	6	5	4
5	41	23	11	8	6	5	4	3
6	49	19	9	6	5	4	3	3

Example Calculation: 3 pph, 274-day irrigation season, save 25 m³/year, volumetric rate of \$5 per m³

$$\$930 \text{ installed cost} \div \$125 \text{ /year net savings (Table 7b)} = 7 \text{ years}$$

Table 10b. Professional Installation Branched Drain Payback Period in Years (@\$2,330)

Persons per Household	Annual Water Savings (m ³)	Volumetric Rate per m ³						
		\$1	\$2	\$3	\$4	\$5	\$6	\$7
1	8	291	146	97	73	58	49	42
2	16	146	73	49	36	29	24	21
3	25	93	47	31	23	19	16	13
4	33	71	35	24	18	14	12	10
5	41	57	28	19	14	11	9	8
6	49	48	24	16	12	10	8	7

Example Calculation: 3 pph, 274-day irrigation season, save 25 m³/year, volumetric rate of \$5 per m³

$$\$2,330 \text{ installed cost} \div \$125 \text{ /year net savings (Table 7b)} = 19 \text{ years}$$

Table 11a. Do-it-Yourself Pumped Systems Payback Period in Years (@\$2,735)

Persons per Household	Annual Water Savings (m ³)	Volumetric Rate per m ³						
		\$1	\$2	\$3	\$4	\$5	\$6	\$7
1	15	-	-	-	576	138	79	55
2	30	-	-	93	46	31	23	18
3	45	-	113	39	24	17	13	11
4	60	-	56	25	16	12	9	8
5	75	-	37	18	12	9	7	6
6	90	322	28	15	10	7	6	5

Example Calculation: 3 pph, 274-day irrigation season, save 45 m³/year, volumetric rate of \$5 per m³

$$\$2,735 \text{ installed cost} \div \$159 \text{ /year net savings (Table 7c)} = 17 \text{ years}$$

Table 11b. Professional Installation Pumped Systems Payback Period in Years (@\$9,185)

Persons per Household	Annual Water Savings (m ³)	Volumetric Rate per m ³						
		\$1	\$2	\$3	\$4	\$5	\$6	\$7
1	15	-	-	-	1,934	465	264	185
2	30	-	-	311	154	103	77	61
3	45	-	379	133	80	58	45	37
4	60	-	187	84	54	40	32	26
5	75	-	125	62	41	31	25	20
6	90	1,081	93	49	33	25	20	17

Example Calculation: 3 pph, 274-day irrigation season, save 45 m³/year, volumetric rate of \$5 per m³

$$\$9,185 \text{ installed cost} \div \$159 \text{ /year net savings (Table 7c)} = 58 \text{ years}$$

4.0 Financial Benefit to the Utility

Utilities can benefit financially from reducing customer water demands, but the magnitude of these benefits vary from utility to utility depending on their own unique conditions. For example, benefits can be significant if the utility is operating at or near its system's peak production rate or if it is faced with a shortage of water supply, whereas the benefit to a utility with a plentiful water supply and an adequately sized water treatment and distribution infrastructure will not be as great.³⁰

One way to evaluate the financial benefit of lowering water demands to a utility is to compare the unit cost of achieving water savings through the implementation of water efficiency programs (demand-side management) to the unit cost of expanding the system's water supply.³¹ If the unit cost of the demand-side option is lower, the water efficiency program is cost-effective and provides a financial benefit to the utility.

Many water utilities provide financial incentives in the form of rebates to customers installing water-efficient products. Ideally the level of the rebate is set such that it is high enough to entice customers to participate in the program³² but low enough to be cost-effective to the water utility. Stated another way, the unit cost of implementing the demand-side option must be lower (or at least no higher) than the unit cost of implementing the supply option if the program is to be cost-effective to the utility.

³⁰ Lower water demands will also reduce a utility's variable costs (e.g., energy and chemical costs).

³¹ The capacity of a water treatment plants is expressed as its maximum daily production rate, e.g., m³/day. In this example the unit cost of supply would be expressed as dollars per m³/day or \$/m³/day.

³² If a rebate level is relatively low compared to the total customer cost to participate in a program (e.g., to buy and install a greywater system) the rebate may not be sufficient to entice customers that would not participate in the program without a rebate. Thus many of the program participants might be considered "free riders."

Water utilities can calculate their maximum rebate level for any water efficiency measure by multiplying their unit cost of providing additional supply (\$/L/day) by the expected average daily water savings per participating customer (e.g., L/day)³³ – see Equation 9.

Equation 9: Maximum Per Customer Rebate Level Based on Equivalent Unit Cost of Supply

$$Lcd \times pph \times Irrigation \text{ Season (days)} \div 365 \text{ days} \times \text{Unit cost of Supply (\$/L/day)}$$

Example Calculation: Maximum cost-effective rebate, landscape-based greywater system saving 45 Lcd, 3 pph, 274-day irrigation season, and a Unit Cost of Supply of \$2 per L/day.

$$45 \text{ Lcd} \times 3 \text{ pph} \times 274/365 \text{ days/year} \times \$2 \text{ per L/day} = \$200$$

5.0 Conclusion

While most homes produce significant volumes of greywater each day, this water is typically discharged to the sewer or septic tank as wastewater. While greywater could be seen as a “free” alternative source of water for such uses as toilet flushing or landscape irrigation, there are generally costs associated with purchasing, installing, operating, and maintaining greywater systems. Although financial benefits are not the only reason homeowners may choose to install a greywater system, if the total life-cycle cost of owning/operating a greywater system is greater than the total cost savings achieved through lower potable water purchases, the greywater system would not be considered cost-effective to the homeowner. Features that may result in a greater potential customer cost savings include:

- High marginal volumetric water (or water/sewer) rates
- Home has a high occupancy rate
- Home is located in area with long irrigation season (e.g. >7 months for landscape-based greywater systems)
- Lower installed costs for greywater systems
- Lower operations and maintenance costs
- Do-it-Yourself Greywater system is installed during home construction vs. retrofit

While reducing customer demands during times of drought can be beneficial to water utilities, greywater reuse programs are better suited as long-term, ongoing programs rather than as short-term solutions to drought. Sustained reductions in customer demands are especially beneficial to water utilities with limited water supplies or that need to expand their water supply/treatment infrastructure. Utilities faced with growing water demands must either increase the supply or reduce the demand (or a

³³ While it is acknowledged that there may be other benefits associated with reducing water demands, e.g., environmental benefits, the focus of this document is specifically on the financial benefits.

combination of both). Utilities must consider the net “yield” and unit costs associated with both supply-side and demand-side options – the solution with the lowest overall unit cost of implementation (e.g., \$/litre/day) that delivers the required incremental or total supply or demand offset will be the most cost-effective solution for the utility.

One of the key messages in this report is that the water savings achieved by a home installing a greywater system is not equal to the volume of greywater produced or captured but rather to **the long-term reduction in potable water demands** achieved by the homeowner. While it is relatively easy to estimate the potential potable water savings associated with the use of shower-to-toilet greywater systems, it is difficult to estimate the potential potable water savings associated with the use of landscaped-based greywater systems because of the large number of variables involved. The completion of more independent field studies may help to quantify these savings.

The savings values provided in this report are based on clearly identified references and assumptions and are meant to provide insight regarding the key parameters that affect savings. Water utilities are strongly encouraged to apply their own values to the equations provided in this report, e.g., volumetric water rates, persons per household, length of irrigation season, greywater system cost, unit cost of adding additional water supply, etc., to assess the cost-effectiveness associated with implementing a single-family greywater reuse program in their own community. As data from more independent third-party filed studies becomes available (especially regarding landscape-based greywater systems) it is hoped that the values identified in this report can be further refined.

Additional information on greywater systems is available on the Alliance for Water Efficiency website: <http://www.allianceforwaterefficiency.org>.