


MAXIMUM ALLOWABLE LOAD = 2 TONNE

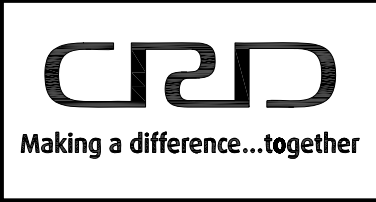

**INTERIOR LIFTING RING
(CAST-IN-PLACE)**

revision date: APRIL 2007	scale: N.T.S.
drawn: PJ/SR	checked: C. GOTTFRED
standard drawing no.:	
3.7	