Pedre Contractors Ltd.

#101 - 26620 56th Avenue, Aldergrove, BC V4W 3X5 | Ph: 604-881-2411 | Fax: 604-881-2412 | info@pedre.ca

January 27, 2021

NOTICE OF CONSTRUCTION

Project: **NWT CRD Sewer Lining Project**

Location: **Burnside Road, Galloping Goose Trail to Washington Avenue (see map on the back)**

Dates: **February 25, 2021 to April, 2021**

This letter is to inform you that Pedre Contractors Ltd. will be working in your area installing cured-in-place pipe (CIPP) liners in the existing 1050mm diameter CRD Sanitary Trunk Sewer that is generally aligned alongside the Galloping Goose Trail and through Arbutus Park. This work is critical and a high priority as the existing sewer is badly corroded and needs to be lined before the pipe fails.

In order to install the liners inside of the existing pipe, the wastewater needs to be pumped out of the existing sewer through four of 250mm diameter hoses placed along the ground. The approximate location of the pumps and hoses are shown on the attached map. Some detours maybe required and ramps will be placed at key locations to maintain pedestrian access. In addition to the temporary pumps and hoses, some equipment will be required at each existing manhole location in order to install and cure the liners. Once the liners are complete, all equipment will be removed and any disturbed areas will be restored.

The liners will be installed generally between the hours of 7 am – 7 pm, but the bypass pumps have to run continuously for 24 hours/day while the liners cure. Work may occur on each day of the week in order to minimize the number of days that the pumps have to run. The pumps will be enclosed within sound dampening structures, but some noise will still be heard in the vicinity of the pumps while they are running.

We apologize for any inconvenience that this work causes and we appreciate your cooperation while we complete this urgent and essential work. In order to keep everyone safe, please stay away from any active work zones and obey all construction signs and traffic personnel.

If you have any further questions, please feel free to contact:

Pedre Contractors Ltd – Bob Dickson – Project Manager – 604-838-3778
Pedre Contractors Ltd – Aaron Cicuto – Site Coordinator – 778-387-7730
Capital Regional District – Stacey Lick – Project Manager – 250-474-9517

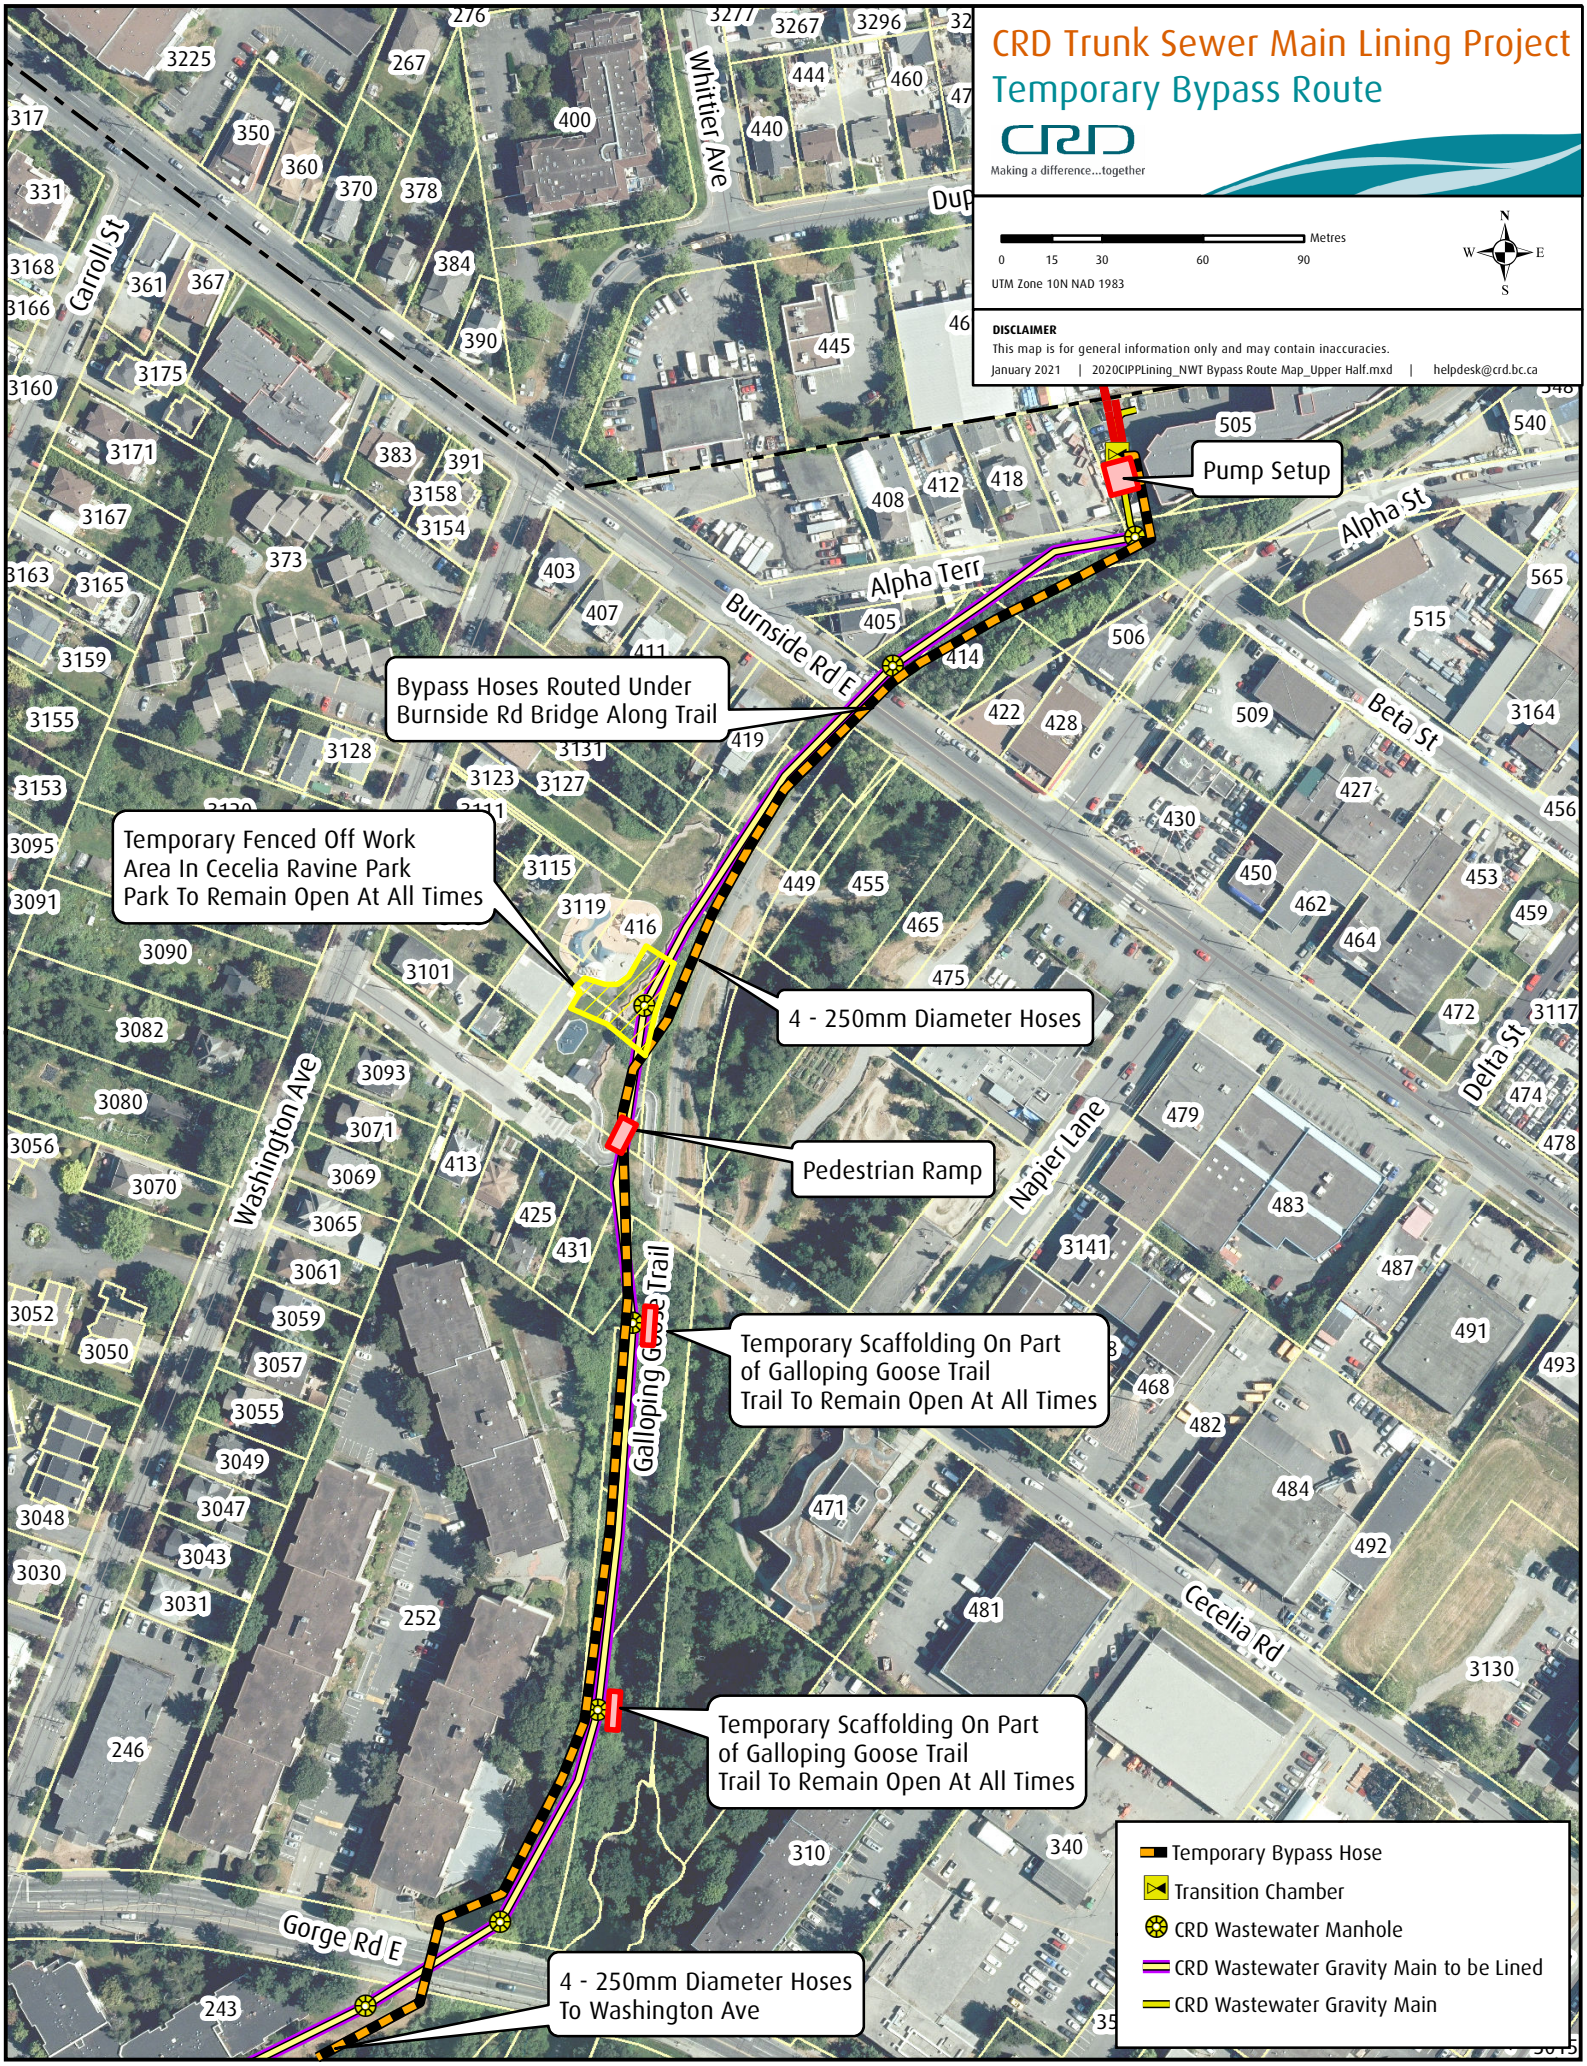
CRD Trunk Sewer Main Lining Project
Temporary Bypass Route
Making a difference...together
Metres
0 15 30 60 90
UTM Zone 10N NAD 1983
N
W E
S
DISCLAIMER
This map is for general information only and may contain inaccuracies.
January 2021 | 2020CIPPLining_NWT Bypass Route Map_Upper Half.mxd | helpdesk@crd.bc.ca
Pump Setup
Bypass Hoses Routed Under Burnside Rd Bridge Along Trail
Temporary Fenced Off Work Area In Cecelia Ravine Park Park To Remain Open At All Times
4 - 250mm Diameter Hoses
Pedestrian Ramp
Temporary Scaffolding On Part of Galloping Goose Trail Trail To Remain Open At All Times
Temporary Scaffolding On Part of Galloping Goose Trail Trail To Remain Open At All Times
4 - 250mm Diameter Hoses To Washington Ave
Temporary Bypass Hose
Transition Chamber
CRD Wastewater Manhole
CRD Wastewater Gravity Main to be Lined
CRD Wastewater Gravity Main
Alpha Terr
Alpha St
Burnside Rd E
Beta St
Delta St
Napier Lane
Cecelia Rd
Gorge Rd E
Washington Ave
Whittier Ave
Carroll St
Galloping Goose Trail